



Polycrystalline - 60 cells



17% efficiency



Only positive tolerance – delivers more than rated wattage



PID resistant



Manufacturing facility regularly vetted by PI Berlin




Advanced German technology for stringing and lamination



Electroluminescence tested to ensure micro-crack free panels



Operational since 2006

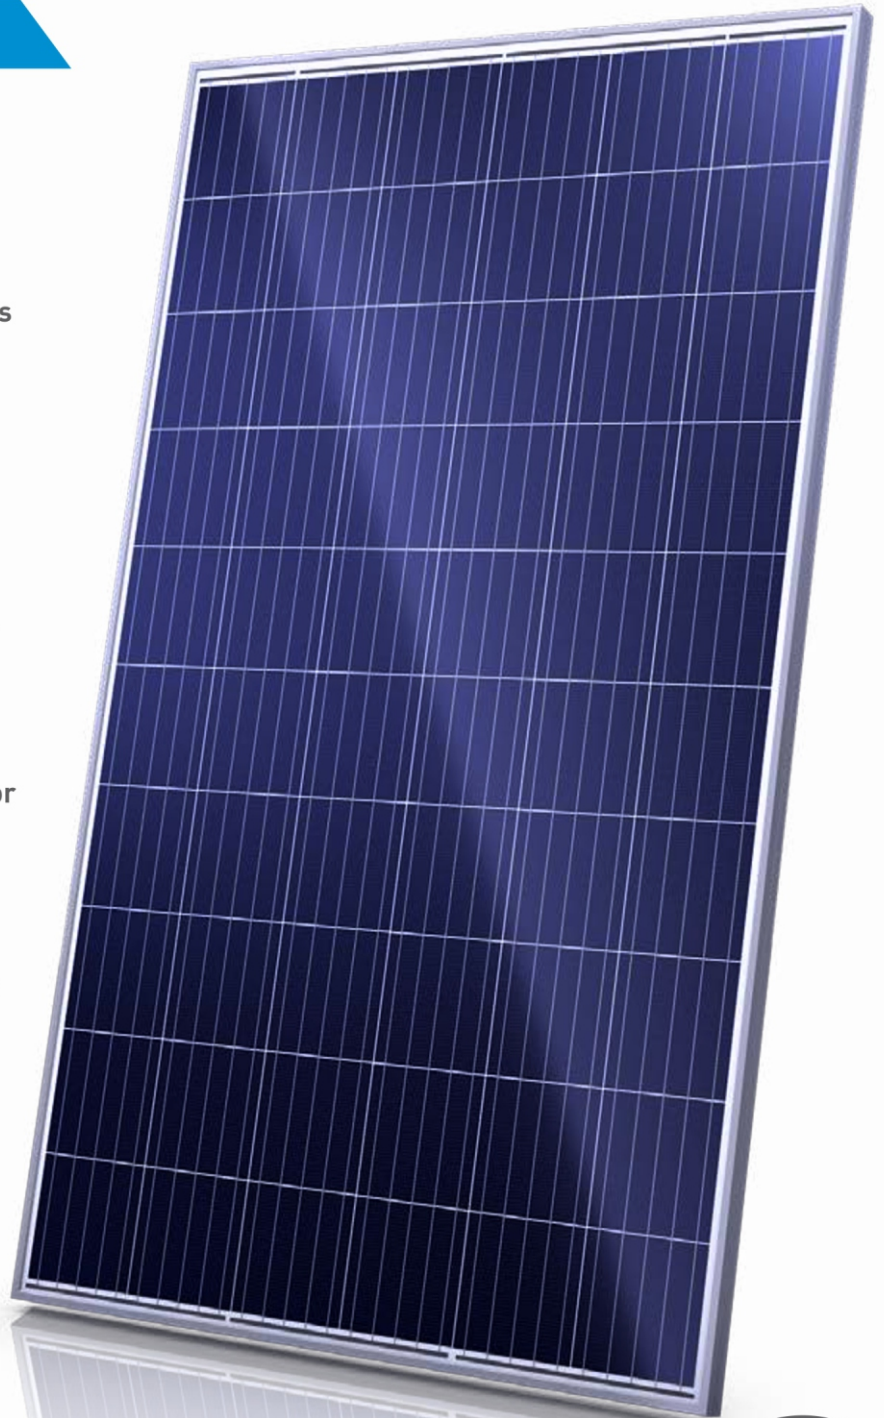

Y O U ' V E G O T T H E P O W E R



Polycrystalline Modules - 60 cells

Electrical Specifications

Rated Power (STC) *	265	270	275
Module Efficiency	16.17%	16.48%	16.78%
Open Circuit Voltage - Voc (Volts)	38.25	38.40	38.55
Short Circuit Current - Isc (Amps)	8.88	9.01	9.15
Max Power Voltage - Vmp (Volts)	30.95	31.10	31.25
Max Power Current - Imp (Amps)	8.56	8.68	8.80

* Rated power data at standard test conditions (STC), E = 1000 W/m², TC = 25° C, AM = 1.5

* tolerance of 0 - +4

Temperature Co-efficient

Open-Circuit Voltage	-0.28% / °C
Short-Circuit Current	+0.05% / °C
Rated Power	-0.41% / °C
NOCT (Normal Operating Temperature)	46±2°C

Mechanical Data

Number of Cells	60 Cells - 156.75mm(6.17in) x 156.75mm(6.17in)
Dimensions in mm: LxW x H	1655mm(65.15in) x 990mm(38.97in) x 35mm(1.37in)
Mounting Dimensions in mm: LxW	1200mm(47.24in) x 954mm(37.55in)
Weight	18 Kgs(39.68 Lbs)
Front Glass	3.2mm/0.12in thick, toughened anti-reflective coated glass, high transmission
Encapsulant	Ethylene Vinyl Acetate (EVA)
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP 67
Number of Bypass Diodes	3 Diodes
Cables	4 Sq mm(0.15in), 1.2 Meter(47.24in) Length Cable
Connectors	MC4 Compatible


Permissible Operating Conditions

Operating Temperature Range	-40° C to 85° C
Max. System Voltage	1500V
Max. Series Fuse Rating	20A
Maximum Wind Load	5400 Pa
Maximum Snow Load	5400 Pa
Application Class	Class A (Safety Class II)


Warranty and Certificates

Product Warranty	10 years
Linear Power Warranty	90% up to 10 Years, 80% up to 25 Years
Certificates	IS 14286, IEC 61215, IEC 61730, IEC 61701, IEC 62804

Note: Specifications are subject to change without notice.

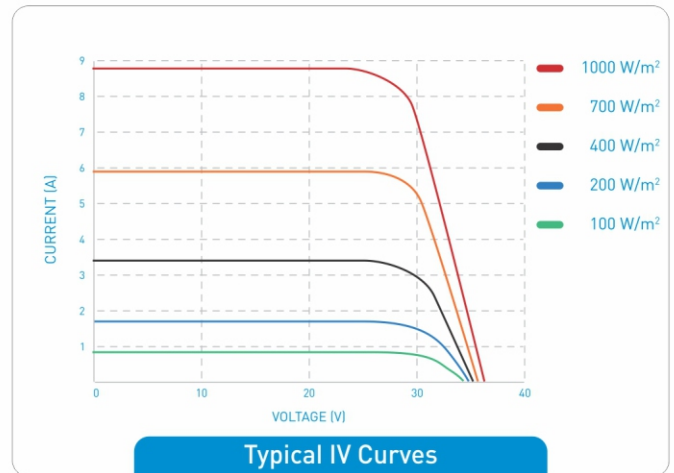

Typical IV Curves

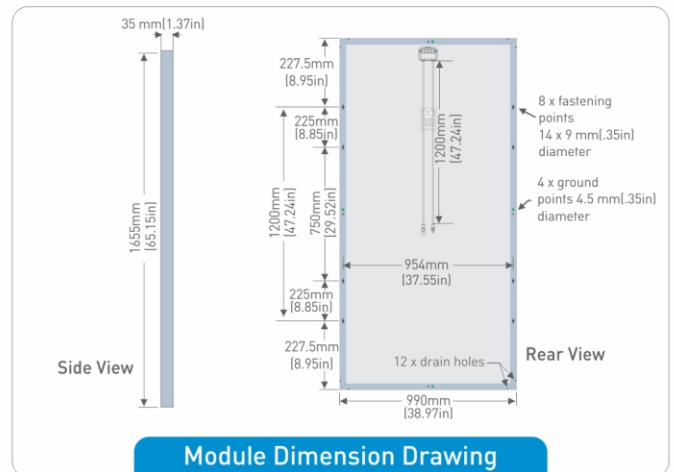

Module Dimension Drawing

Packaging Information

No. of panels per pallet	28 nos
No. of pallets per container (40'HC)	24 nos
Total no. of panels per container (40'HC)	672 nos



Orb's State of the Art PV Plant in Bangalore

Call us: + 91 9900520505 Email: sales@orbenergy.com Web: www.orbenergy.com

Orb Energy, 95 Digital Park Road, 2nd Stage, Yeshawanthapura, Bangalore 560022, India